

Bromic Comparison

Gas - **Platinum & Tungsten**
Electric - **Platinum & Tungsten**
Portable **Gas Only**
Controllers: **On/Off and Dimmable**

*Design Service available at no cost.

GAS:

Platinum - Contemporary

300 LP-NG 500 LP-NG
23,600 39,800 BTU
160 sq. ft. 215 sq. ft.
Wind resistance up to 11 mph
Min distance to combustibles w/o heat shield 36"
Min distance to combustibles with heat shield 14"
Min. floor clearance: 96" (8ft)
Ceiling Mount Poles: 9.69", 13.62", 17.56", 25.43", 33.31, & 41.18"
Requires: 110V/2A

Tungsten - Traditional

300 LP-NG 500 LP-NG
26,000 & 43,000 BTU
160 sq. ft. 215 sq. ft.
Wind resistance up to 8 mph
Min. floor clearance: 96" (8ft)

Electric:

Platinum - Contemporary

2300 watt 3400 Watt
7,843 BTU 11,595 BTU
65 sq. ft. 108 sq. ft.
220-240VAC – 9.6A 220-240VAC – 14.2A
Min. mounting height: WALL 72" (6ft)
Max. mounting height: 96" (8ft)

White or Black with Brushed Stainless Finish
Tinted Glass Ceramic Glass Screens
Recess kits available: 10" Min. Depth Req.
Tube suspension kit available:
23.6" & 47.25" (cut to length needed)
lengths available

Tungsten - Traditional

2000 WATT 3000 WATT 4000 WATT 6000 Watt
6,820 BTU 10,230 BTU 13,640 BTU 20,460 BTU
65 sq. ft., 100 sq. ft., 130 sq. ft. 160 sq. ft.
220VAC - 8.3A 220VAC - 12.5A 220VAC - 16.6A 220VAC - 25A
Min. mounting height: WALL 96" (8ft)
Min. mounting height: WALL 96" (8ft)
Single element: 2000 & 3000 WATT**
Double element: 4000 & 6000 WATT**
White and Black high Temp Paint Finish
Recess kits available: 20" Min. Depth Req.
Tube suspension kits available: 9.84" & 11.80"

**Lifetime warranty on tungsten electric elements.

Portable:



21,300 – 38,500 BTU Variable heat
Up to 215 sq. ft. heating coverage
Minimum Ceiling Clearance: 36"
Wind Resistance up to 8 MPH
123.5 lbs. weight
Configured as LP (convertible to NG)
10 lbs or 20lbs cylinder compatible (Not included)
Battery activated spark ignition
Flame failure and anti-tilt device safety

Controllers:

On/Off & Dimmable available

of heaters to controllers are based on Amps of the heater. (see bottom of Controller Spec Sheet)


42 channel remote available - for large commercial applications. (Dimmable controller only)

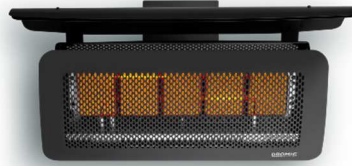

Alternative Brands:

Infratech

Sunpak

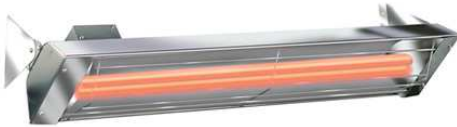

Solaira

