



Superior
FIREPLACES®




WCT6920 EPA Wood Burning Fireplace




- High Efficiency Burn
- 2.0 Cubic Foot Firebox
- Non-Catalytic Operation
- Variable Draft Control with Boost Air System
- 6" Snap-Pak Venting
- Robust Construction & Quality Materials
- White Brick Refractory Panels
- Accessory Offerings

- EPA 2020 Certified
- Framing Dimensions
- Installation Clearances
- Adjustable Nailing Flanges
- Improved 200 CFM Blower
- Draft Control Handle

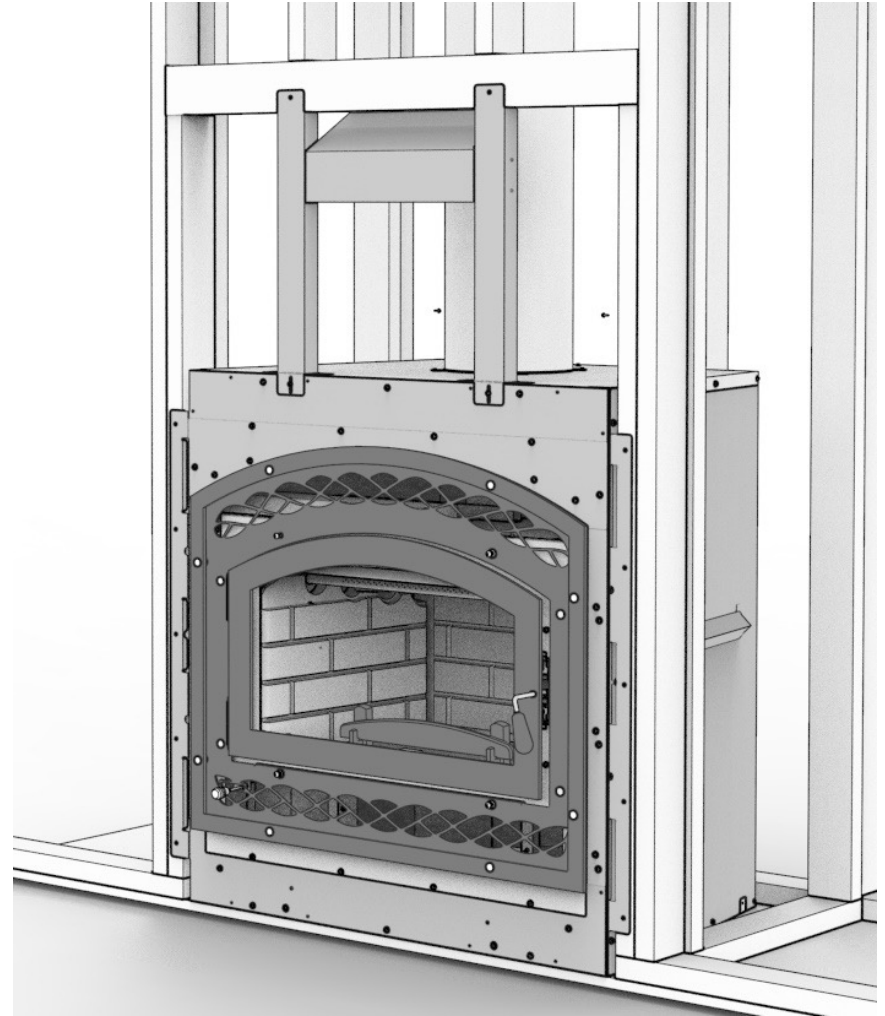

New Side & Upper Nailing Flanges

- Allows unit to be installed flush or proud of framing
- Accommodates range of installation scenarios and facing materials
- Still includes base nailing flanges for attaching to floor
- Upper Nailing Flange Assembly Ships Loose on Top of Unit

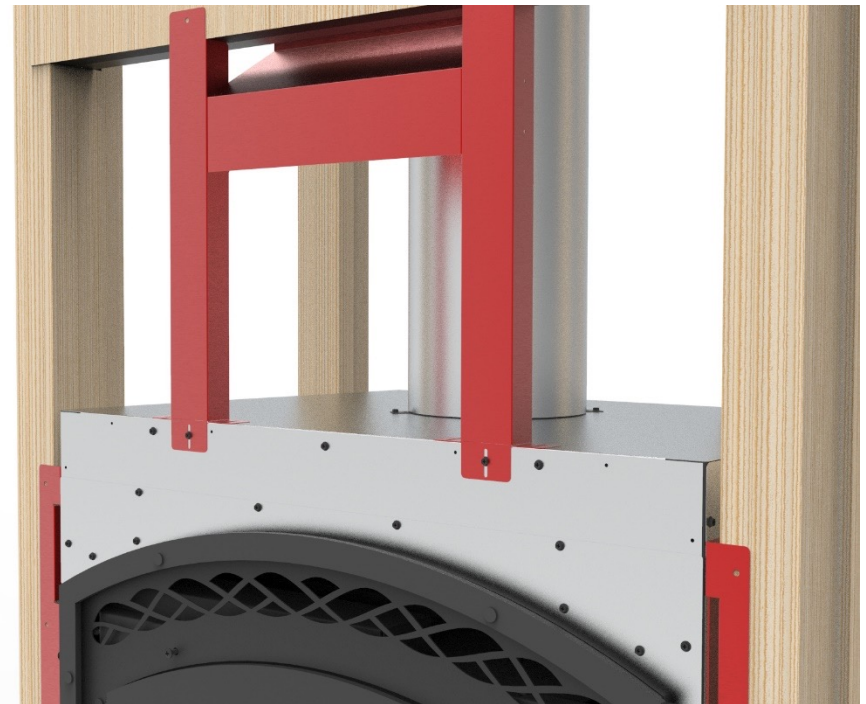

	Specifications
Firebox Interior	22"W x 11-3/4"H x 12"D
Firebox Volume	2.0 Cubic Feet
Maximum Log Size	19"
EPA Rating	1.9 grams / hour
Max BTU's	55,000
Heat Capacity	Up to 1,500 square feet
Blower	200 CFM
Venting	USA: 6" Snap-Pak, CAN: 6" ASHT+, S2100+, Duratech

- Two Door Options
 - Smooth Steel
 - Cast Iron
- Smooth Steel Façade
- HeatFlo Kit
- Forced Air Kit



- New Brochure
- Updated Website
- Online Burn Videos
- Training Presentation
- Launch Announcement



WRT3920



WCT6920



WCT6940

